




## Patch Repair Kit Instruction Sheet

### **STEP 1.**

Clean area to be repaired with alcohol solution and let dry thoroughly before proceeding. Surface temperature of product to be repaired should be 50° F. or greater.

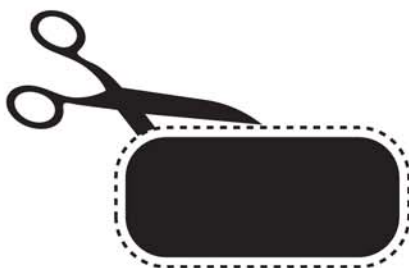


### **STEP 2.**

Cut patch to size, rounding off all corners. Make sure patch extends at least 1 inch beyond the tear in all directions.

### **STEP 3.**

Peel back 1/2 of the protective backing on the patch. Apply patch to perimeter of affected area taking care to remove air pockets and seal edges.

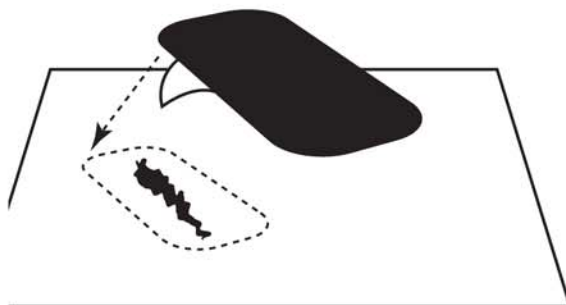

### **STEP 4.**

Remove the remainder of the backing and seal patch to pool liner.

### **STEP 5.**

Rub entire patch aggressively to insure proper seal.

**Note:** Patch should be applied to inside of pool. For additional reinforcement, patches can be applied to both sides of area. If area to be repaired is larger than patch, multiple patches can be used taking care to overlap patches by 1 inch.